
BODY DIMENSION DRAWINGS
ENGINE COMPARTMENT

(Three-Dimensional Distance)

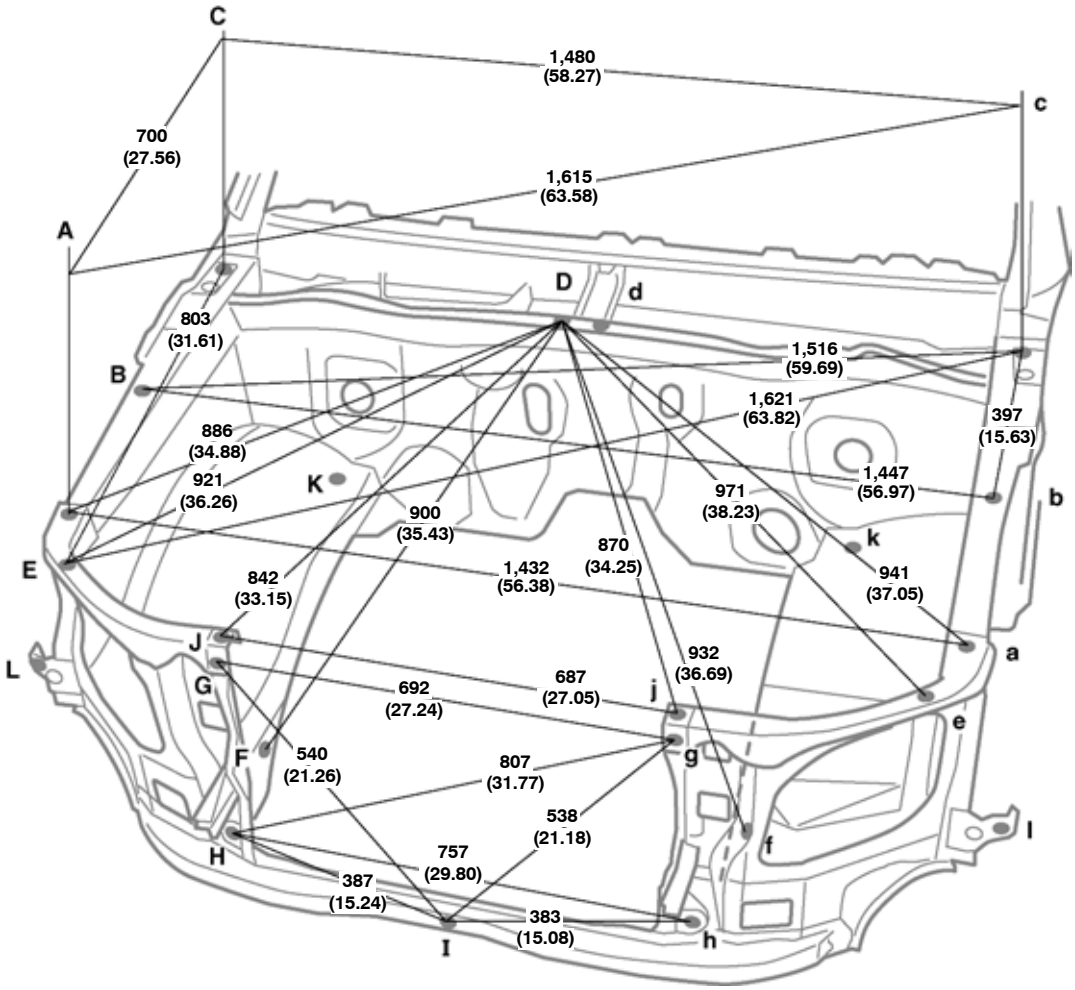

Vehicle Dimensions

D-K or d-k	D-k or d-K	E-e	K-k	L-l
612 (24.09)	667 (26.26)	1,340 (52.76)	1,002 (39.45)	1,606 (63.23)

Height from Imaginary Standard Line

A, a	C, c	J, j
889 (35.00)	973 (38.31)	886 (34.88)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front fender installation nut	6 (0.24) nut	G, g	Radiator upper center support installation nut	6 (0.24) nut
B, b	Front fender installation nut	6 (0.24) nut	H, h	Radiator service hole	30 (1.18)
C, c	Hood hinge installation nut-rear	8 (0.31) nut	I	Hood lock center brace installation nut	6 (0.24) nut
D, d	Cowl louver installation hole	8 (0.31)	J, j	Radiator upper center support installation nut	6 (0.24) nut
E, e	Radiator support upper installation hole	10 (0.39)	K, k	Front fender apron installation hole	10 (0.39)
F, f	Front fender apron installation hole	10 (0.39)	L, l	Front end panel NO. 1 bracket installation hole	7 (0.28)

BODY OPENING AREAS (Side View: Front)

(Three-Dimensional Distance)

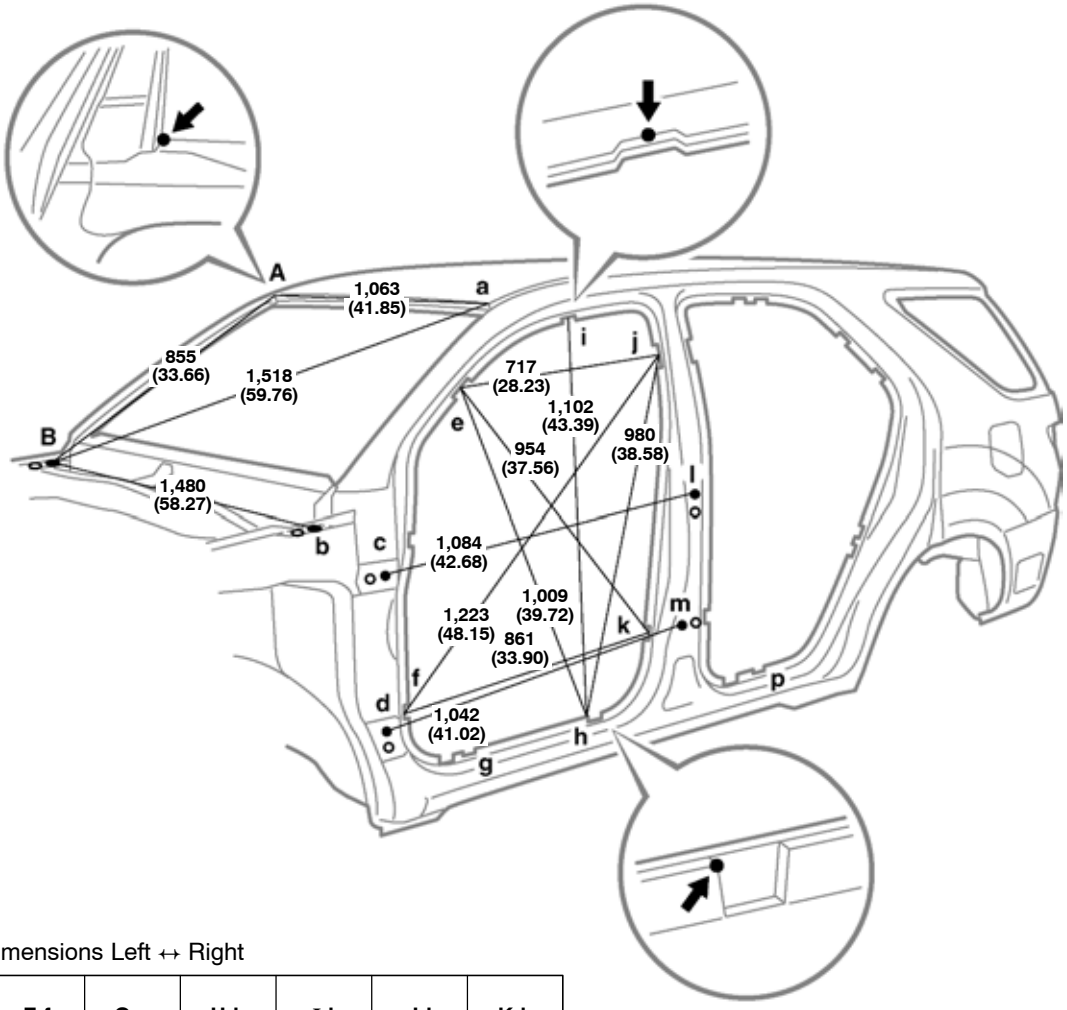

Vehicle Dimensions Left ↔ Right

E-e	F-f	G-g	H-h	I-i	J-j	K-k
1,349 (53.11)	1,457 (57.36)	1,480 (58.27)	1,482 (58.35)	1,220 (48.03)	1,366 (53.78)	1,477 (58.15)

E-f or e-F	E-h or e-H	E-j or e-J	F-j or f-J	F-k or f-K	G-p or g-P	H-I or h-I	J-k or j-K
1,611 (63.43)	1,737 (68.39)	1,535 (60.43)	1,867 (73.50)	1,701 (66.97)	1,841 (72.48)	1,738 (68.43)	1,600 (62.99)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Roof panel corner	—	H, h	Rocker panel assembly mark	—
B, b	Hood hinge installation nut-rear	8 (0.31) nut	I, i	Roof side rail assembly mark	—
C, c	Front door hinge installation nut	8 (0.31) nut	J, j	Center body pillar assembly mark	—
D, d	Front door hinge installation nut	8 (0.31) nut	K, k	Center body pillar assembly mark	8 (0.31) nut
E, e	Front body pillar assembly mark	—	L, l	Rear door hinge installation nut	8 (0.31) nut
F, f	Front body pillar assembly mark	—	M, m	Rear door hinge installation nut	—
G, g	Rocker panel assembly mark	—	P, p	Quarter panel assembly mark	—

BODY OPENING AREAS (Side View: Rear)

(Three-Dimensional Distance)

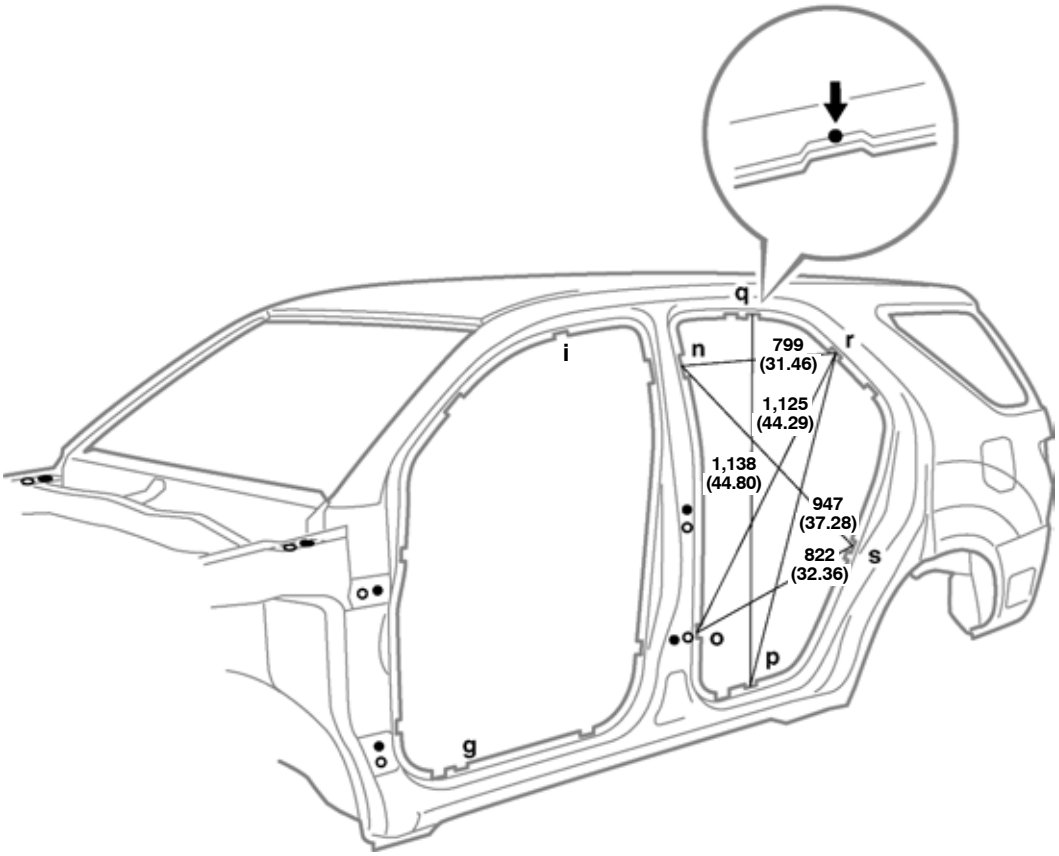

Vehicle Dimensions Left ↔ Right

N-n	O-o	P-p	Q-q	R-r	S-s
1,368 (53.86)	1,476 (58.11)	1,480 (58.27)	1,205 (47.44)	1,353 (53.27)	1,456 (57.32)

I-q or i-Q	N-r or n-R	N-s or n-S	O-s or o-S	P-q or p-Q	R-s or r-S
715 (28.15)	1,578 (62.13)	1,699 (66.89)	1,681 (66.18)	1,754 (69.06)	1,519 (59.80)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
G, g	Rocker panel assembly mark	—	P, p	Quarter panel assembly mark	—
I, i	Roof side rail assembly mark	—	Q, q	Roof side rail assembly mark	—
N, n	Center body pillar assembly mark	—	R, r	Quarter panel assembly mark	—
O, o	Center body pillar assembly mark	—	S, s	Quarter panel assembly mark	=

BODY OPENING AREAS (Rear View)

(Three-Dimensional Distance)

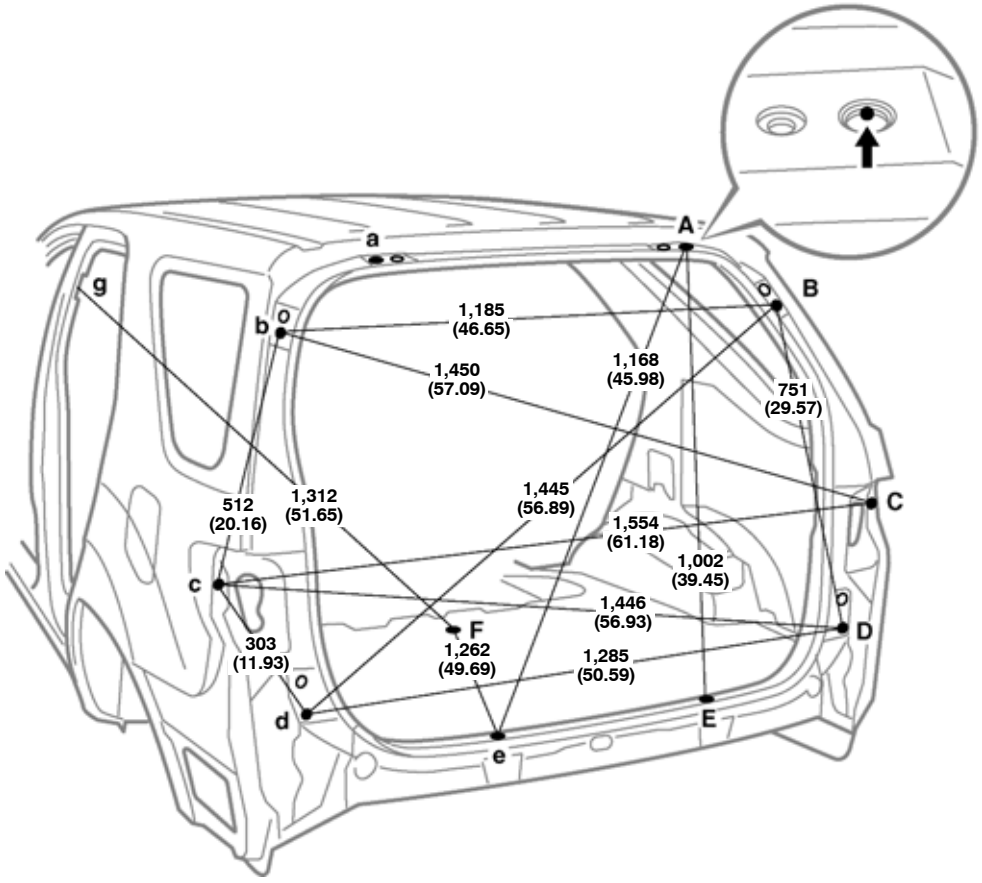


HINT: For Symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)


Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Back door hinge installation hole-outer	13 (0.51)	E, e	Scuff plate installation hole	8.5 (0.335)
B, b	Back door damper stay installation nut	6 (0.24) nut	F	Rear floor pan standard hole	45 (1.77)
C, c	Quarter panel standard hole	12 × 8 (0.47 × 0.31)	G, g	Center body pillar assembly mark	—
D, d	Side stopper installation nut	8 (0.31) nut	—	—	—

FRAME DIMENSION-Upper Face

(Three-Dimensional Distance)

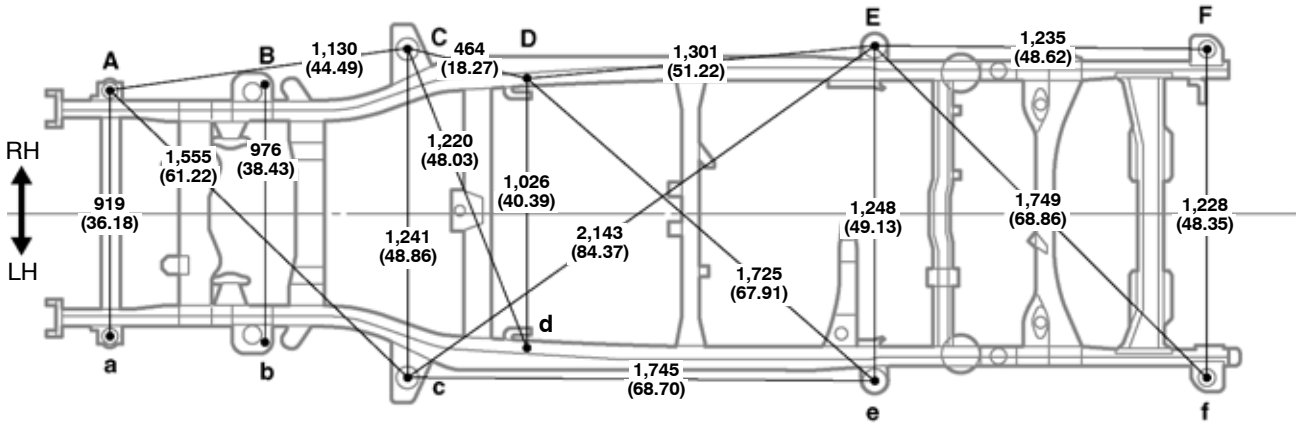

Front ←

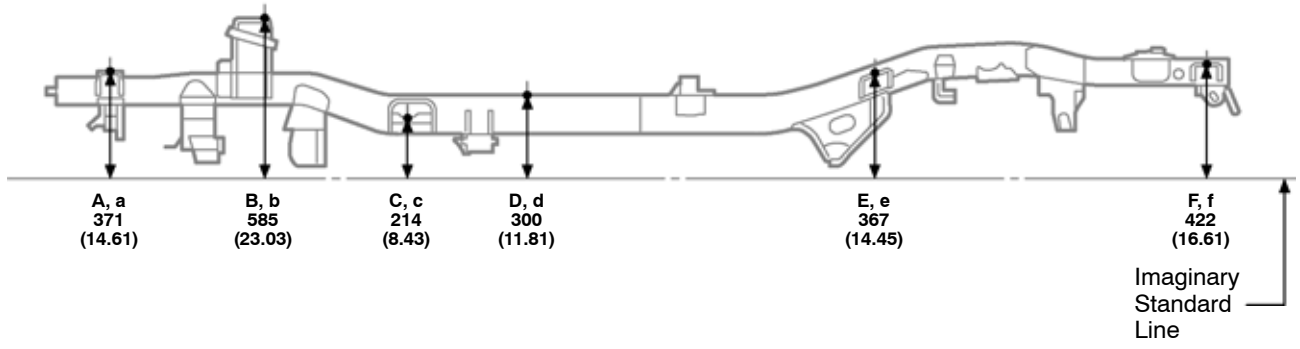


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	26 (1.02)	D, d	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
B, b	Shock absorber installation hole	12.2 (0.480)	E, e	Body mounting hole	31 (1.22)
C, c	Body mounting hole	31 (1.22)	F, f	Rear body mounting hole	65 (2.56)


FRAME DIMENSION-Upper Face

(Two-Dimensional Distance)

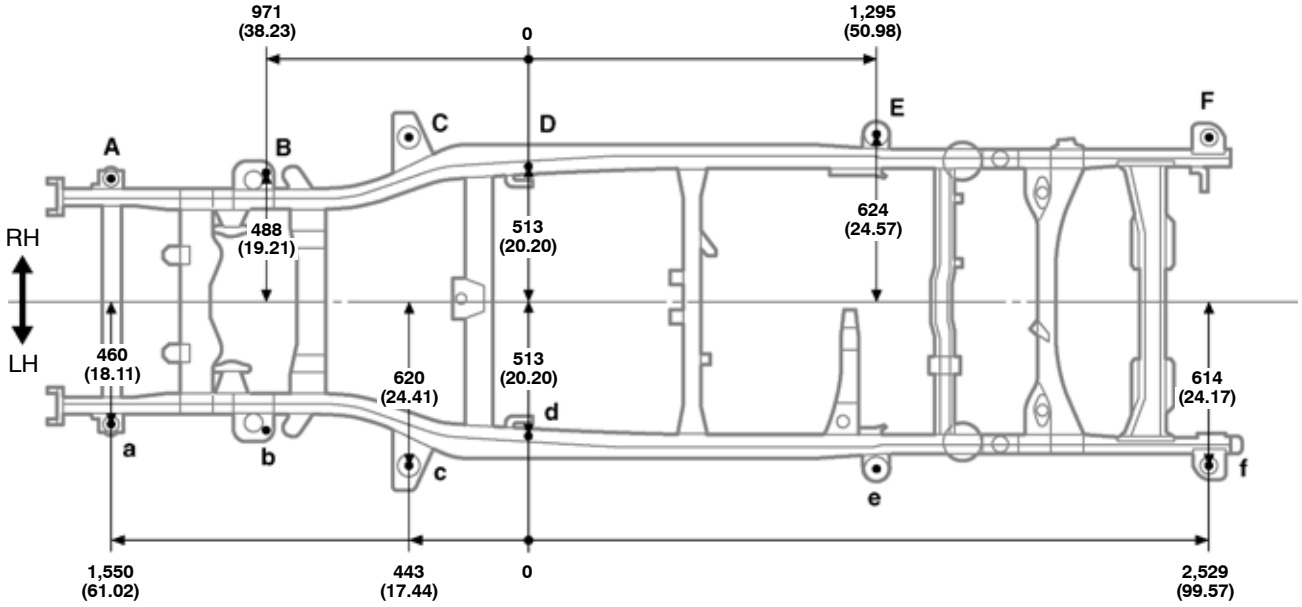

Front ←

Wheel base	2,750 (108.27)

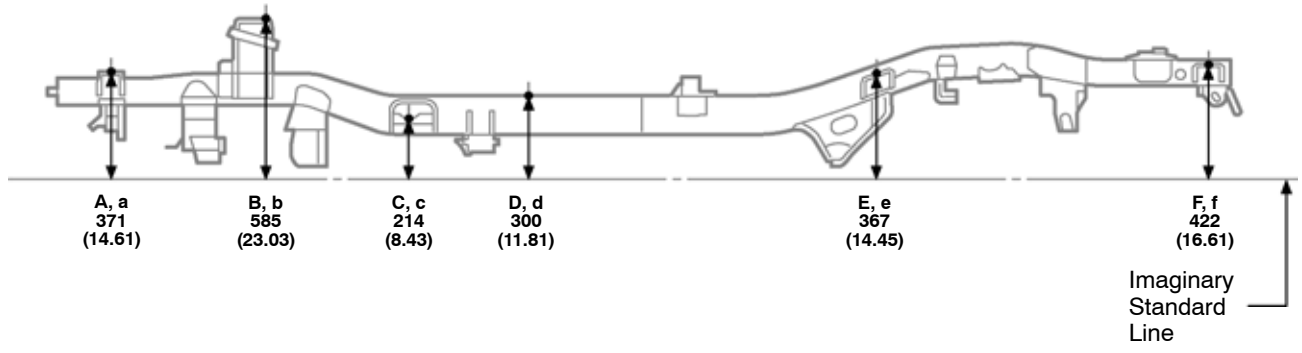


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	26 (1.02)	D, d	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
B, b	Shock absorber installation hole	12.2 (0.480)	E, e	Body mounting hole	31 (1.22)
C, c	Body mounting hole	31 (1.22)	F, f	Rear body mounting hole	65 (2.56)


FRAME DIMENSIONS-Lower Face

(Three-Dimensional Distance)

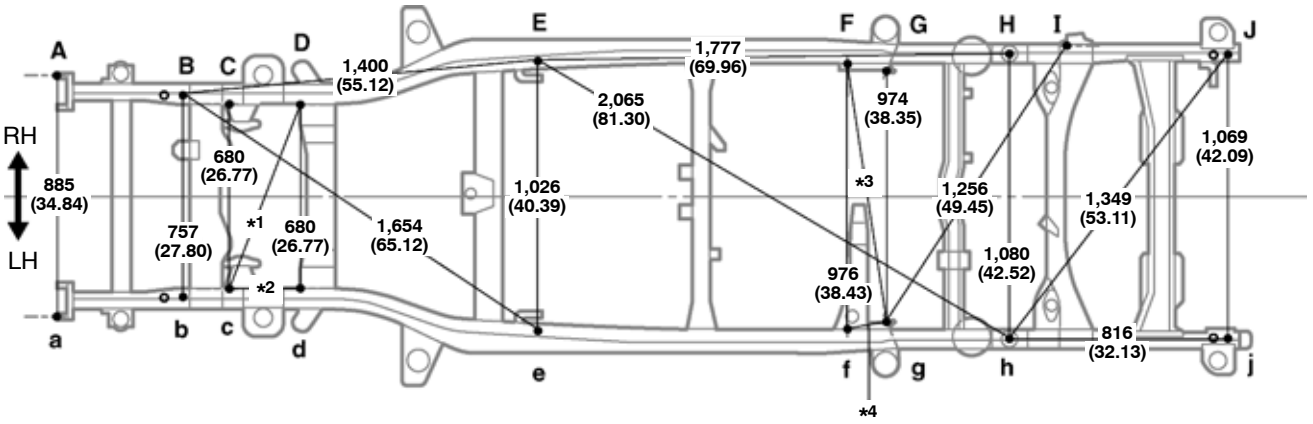

Front ←

*1	733 (28.86)
*2	272 (10.71)
*3	997 (39.25)
*4	209 (8.23)

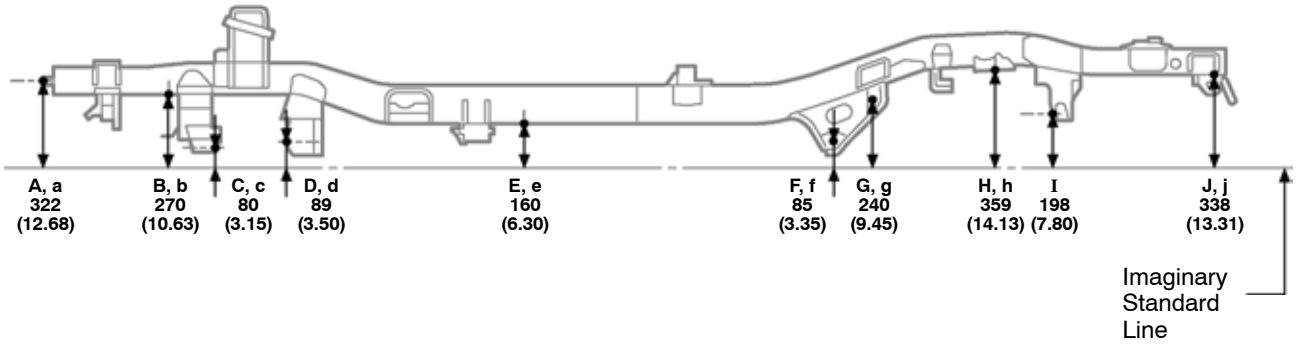


mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Bumper reinforcement installation bolt	10 (0.39) bolt	F, f	Lower control arm installation hole	14.2 (0.559)
B, b	Stabilizer bracket installation nut	10 (0.39) nut	G, g	Upper control arm installation hole	14 (0.55)
C, c	Suspension lower arm installation hole	14.5 x 32.5 (0.571 x 1.280)	H, h	Bound stopper standard hole	9 (0.35)
D, d	Suspension lower arm installation hole	16.5 x 34.5 (0.650 x 1.358)	I	Lateral control rod installation hole	12.2 (0.480)
E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)	J, j	Transport hook installation nut	13 (0.51) nut


FRAME DIMENSION-Lower Face

(Two-Dimensional Distance)

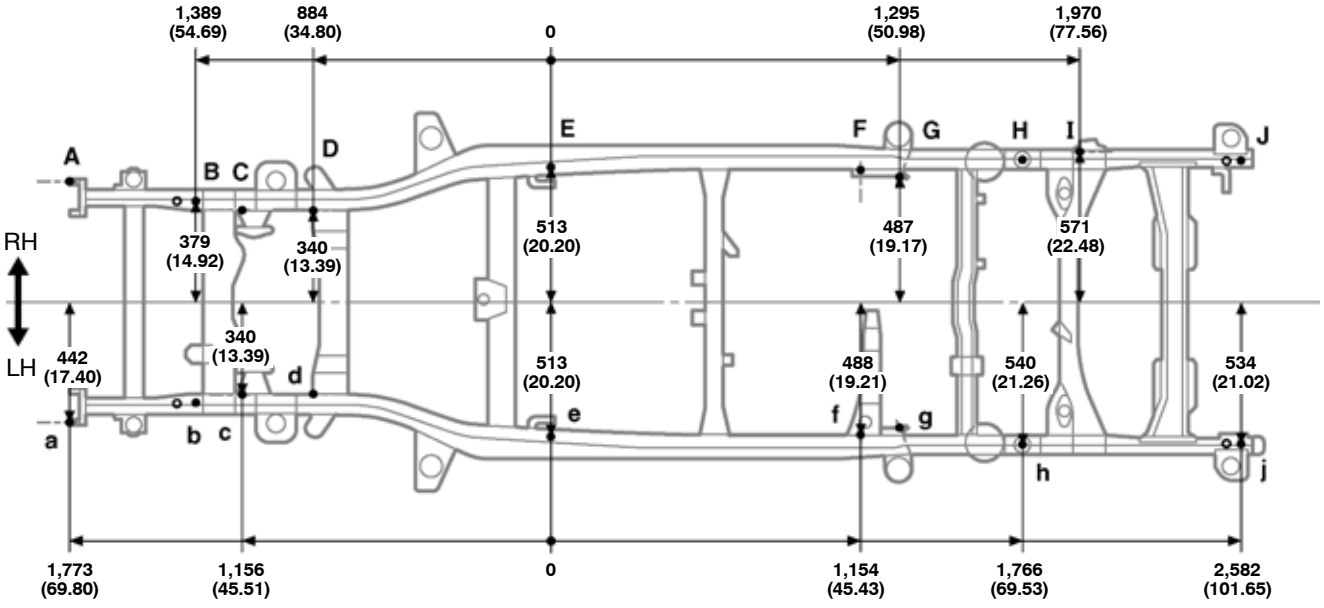

Front ←

Wheel base	2,750 (108.27)

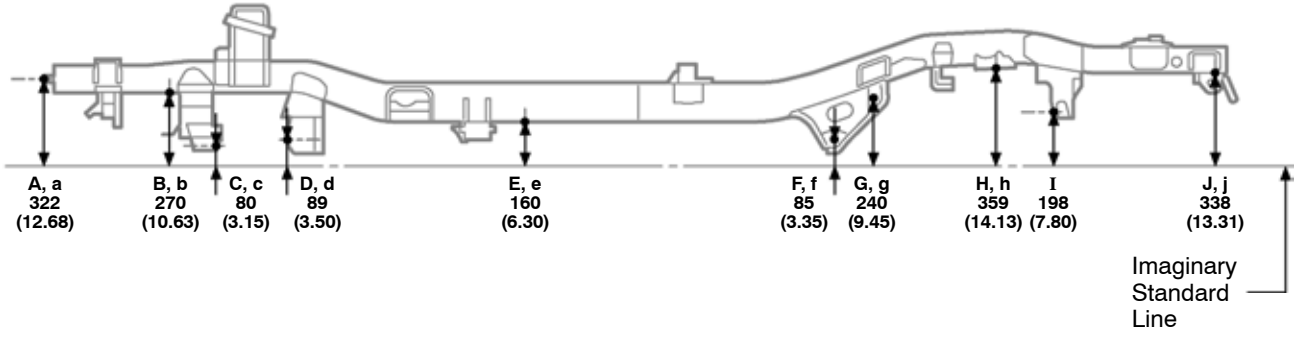

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Bumper reinforcement installation bolt	10 (0.39) bolt	F, f	Lower control arm installation hole	14.2 (0.559)
B, b	Stabilizer bracket installation nut	10 (0.39) nut	G, g	Upper control arm installation hole	14 (0.55)
C, c	Suspension lower arm installation hole	14.5 x 32.5 (0.571 x 1.280)	H, h	Bound stopper standard hole	9 (0.35)
D, d	Suspension lower arm installation hole	16.5 x 34.5 (0.650 x 1.358)	I	Lateral control rod installation hole	12.2 (0.480)
E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)	J, j	Transport hook installation nut	13 (0.51) nut