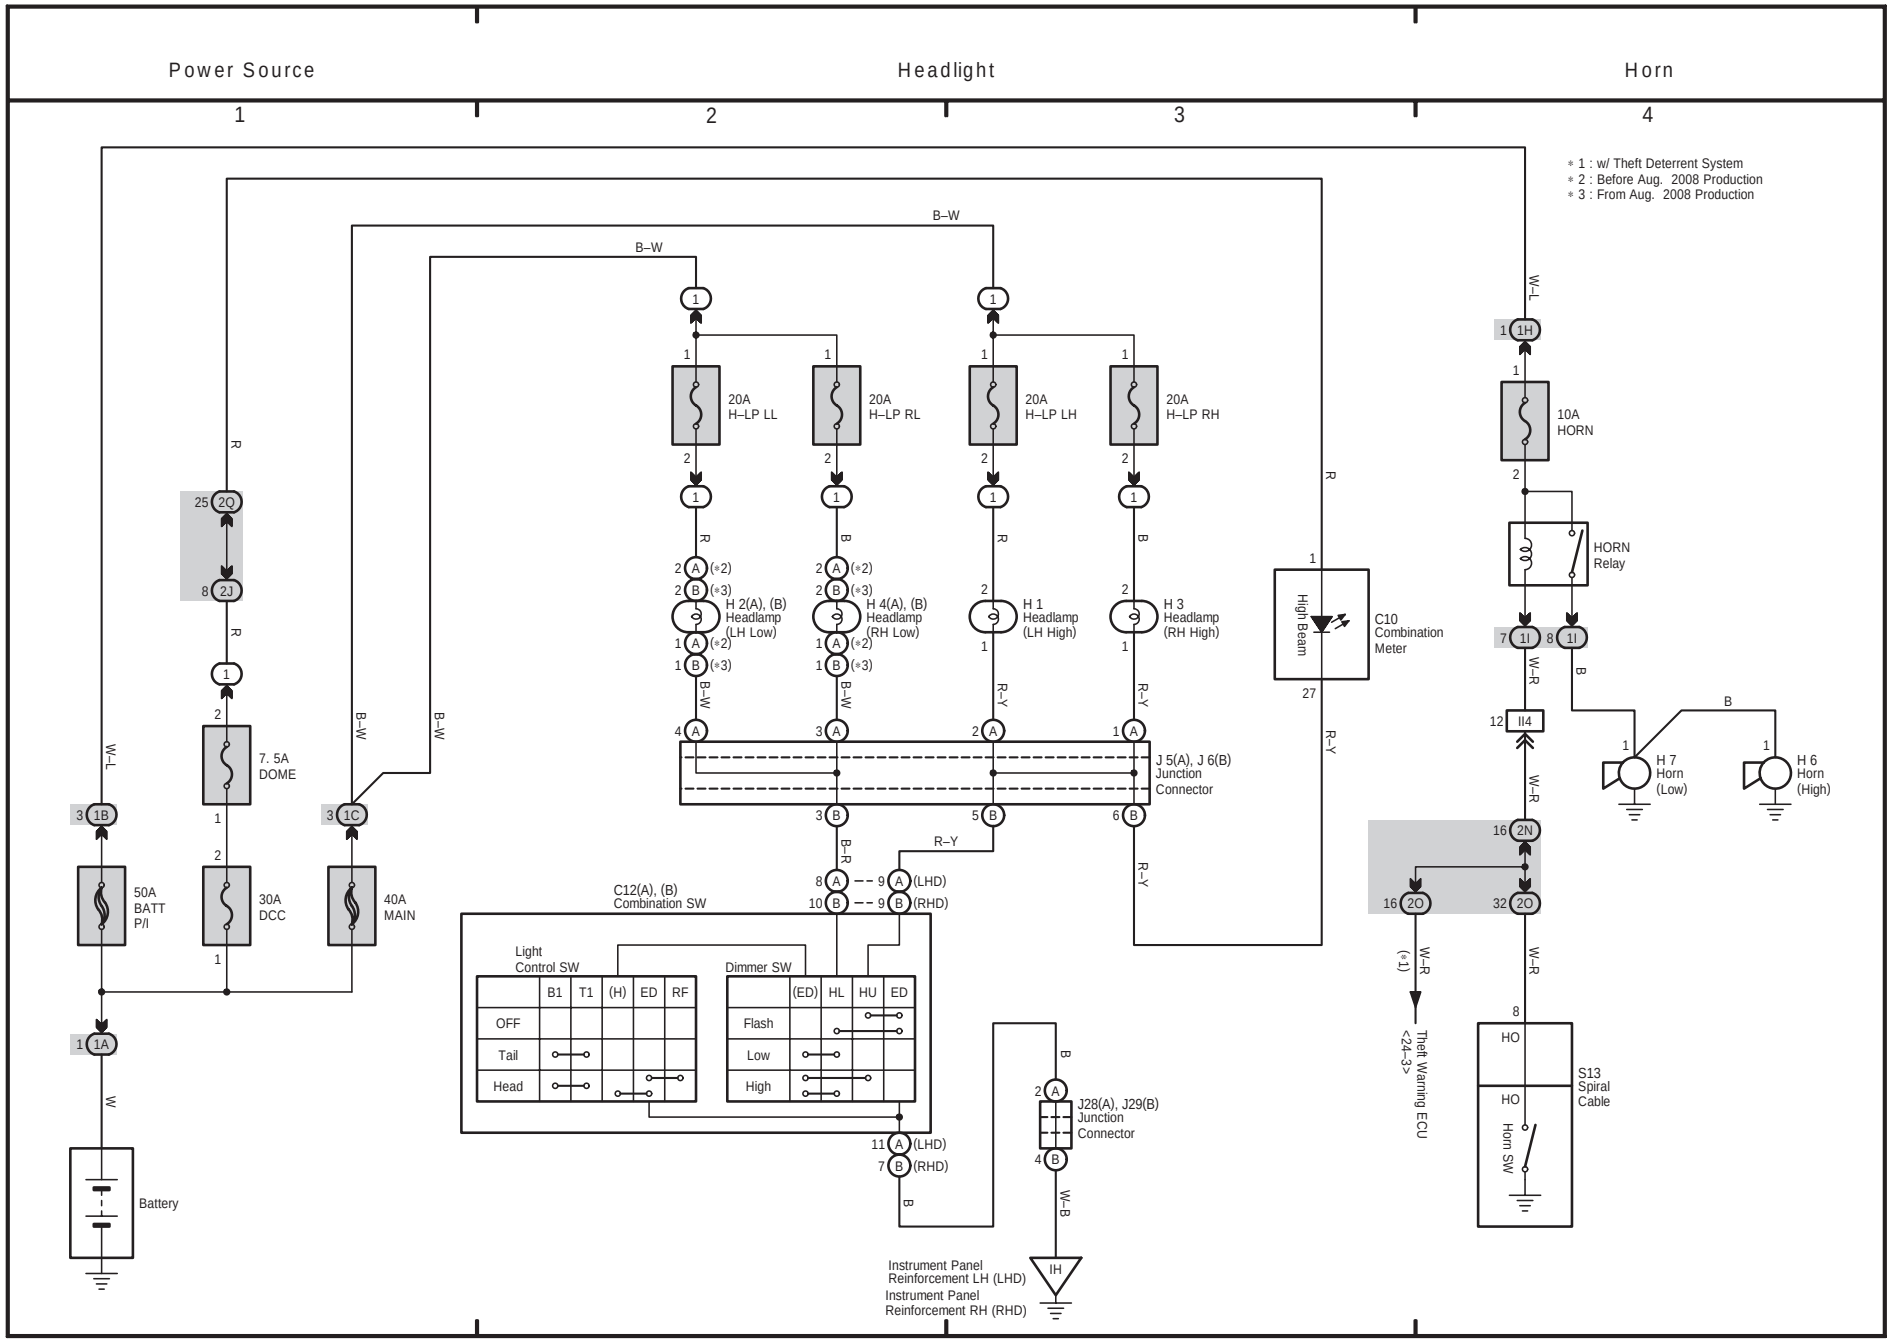

Power Source
Headlight
Horn
1
2
3
4
＊1 : w/ Theft Deterrent System
＊2 : Before Aug. 2008 Production
＊3 : From Aug. 2008 Production
B–W
W–L
R
R–Y
B–R
W–R
W–B
B
W
20A H–LP LL
20A H–LP RL
20A H–LP LH
20A H–LP RH
10A HORN
HORN Relay
7. 5A DOME
50A BATT P/I
30A DCC
40A MAIN
Battery
H 2(A), (B) Headlamp (LH Low)
H 4(A), (B) Headlamp (RH Low)
H 1 Headlamp (LH High)
H 3 Headlamp (RH High)
J 5(A), J 6(B) Junction Connector
C12(A), (B) Combination SW
Light Control SW
B1 T1 (H) ED RF
OFF
Tail
Head
Dimmer SW
(ED) HL HU ED
Flash
Low
High
J28(A), J29(B) Junction Connector
Instrument Panel Reinforcement LH (LHD)
Instrument Panel Reinforcement RH (RHD)
IH
C10 Combination Meter
High Beam
Theft Warning ECU <24–3>
S13 Spiral Cable
Horn SW
H 7 Horn (Low)
H 6 Horn (High)