

RADIATOR SIDE SUPPORT (ASSY)


F20972-C

REPLACEMENT

REMOVAL

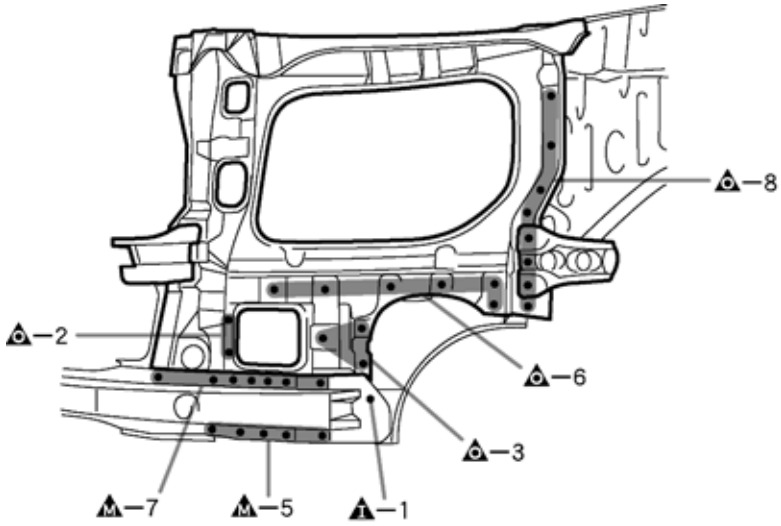


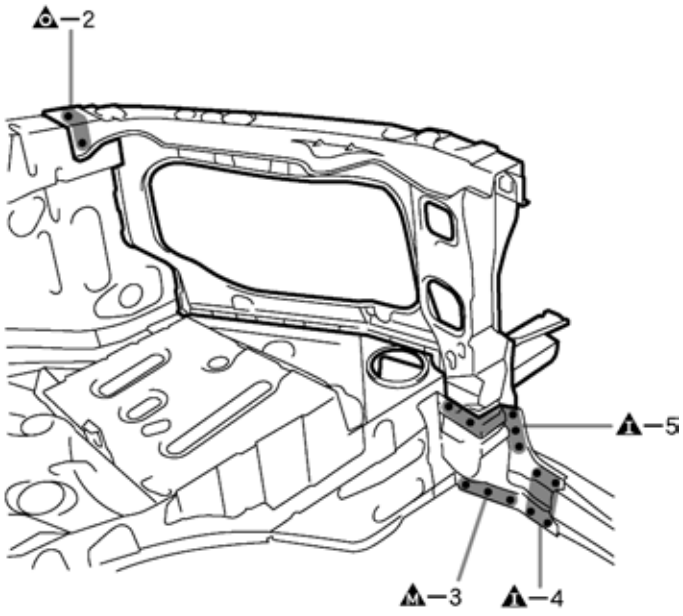

F20972

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam to the corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

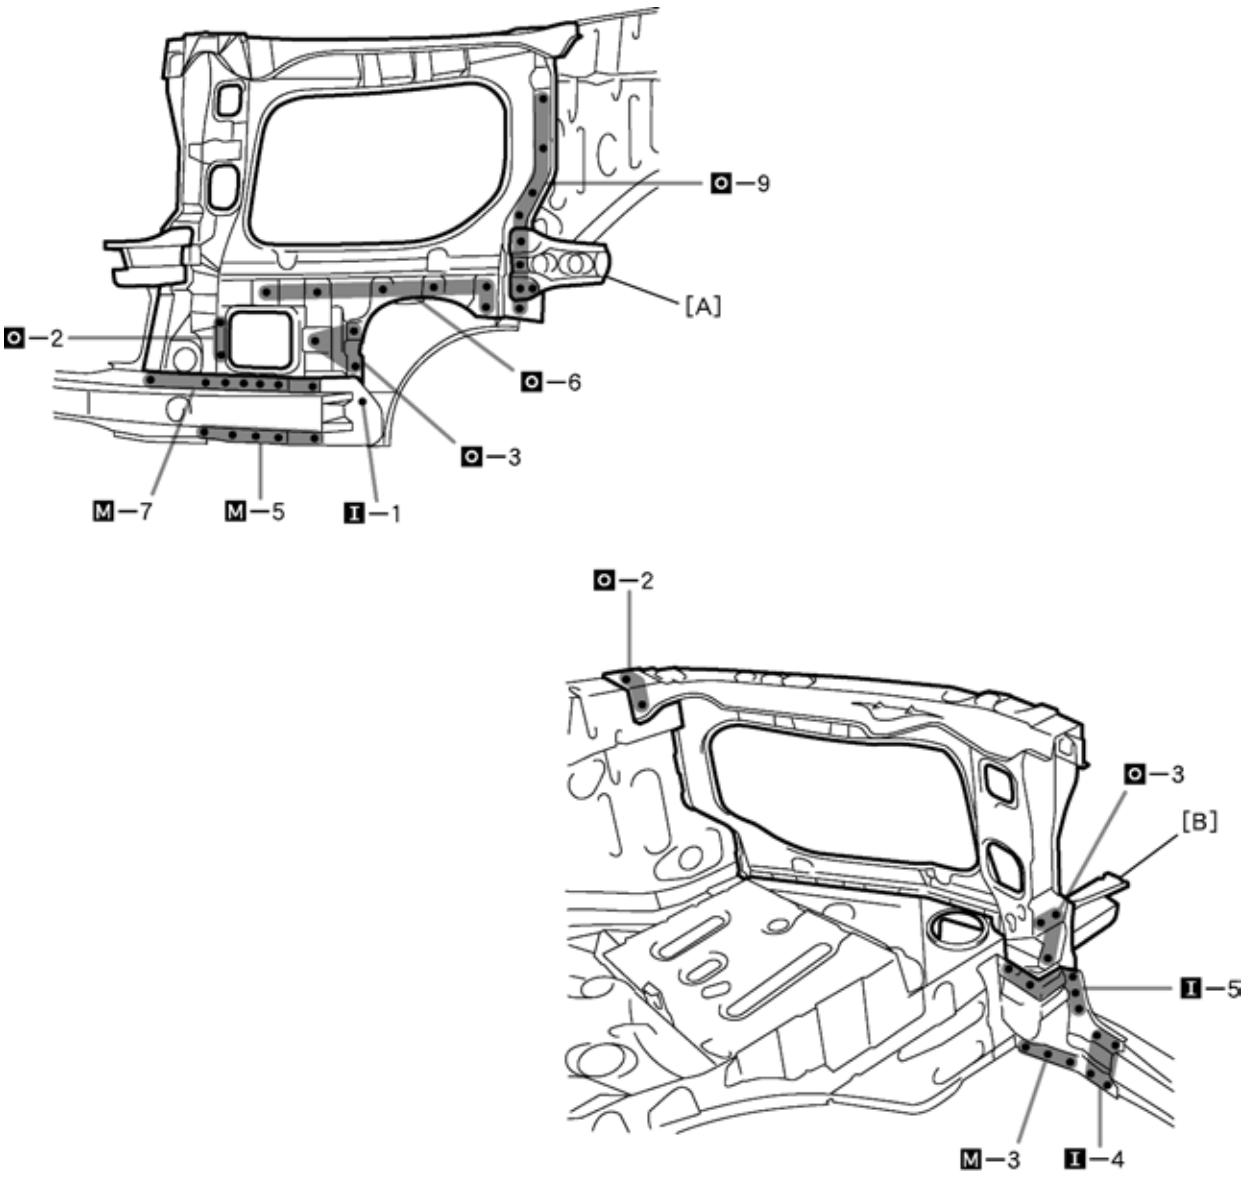



POINT

1 Inspect the fitting of the headlight and front fender, etc., before welding, since this affects the appearance of the finish.

PART NAME

[A] Radiator Support To Front Fender Bracket [B] Front End Panel No. 1 Extension

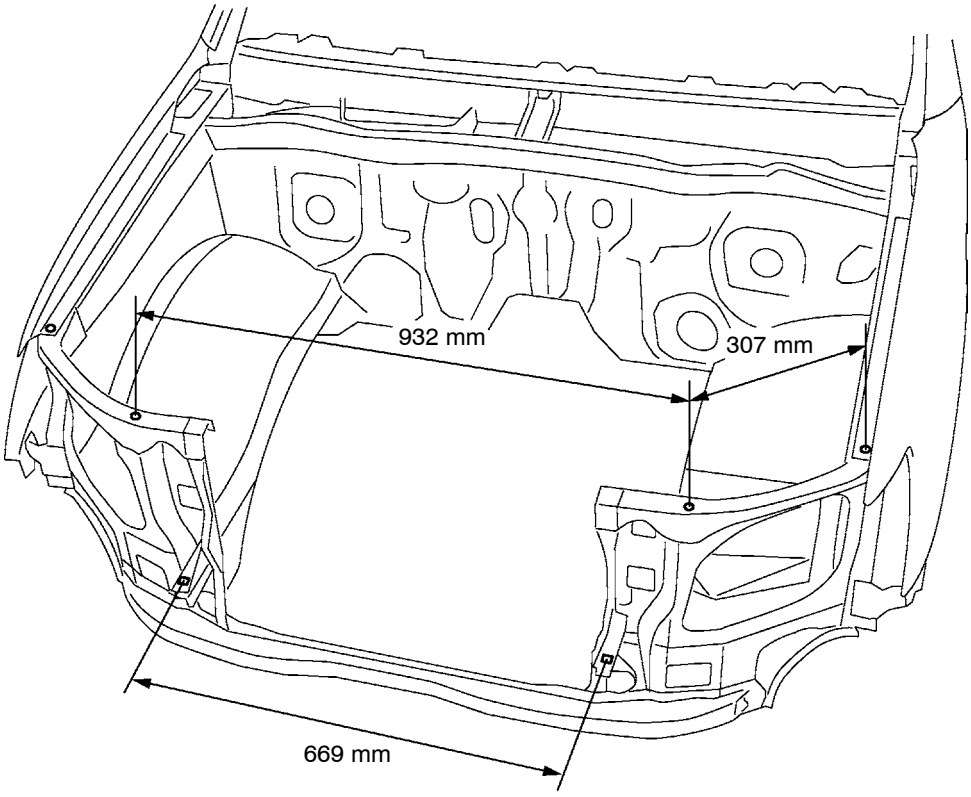

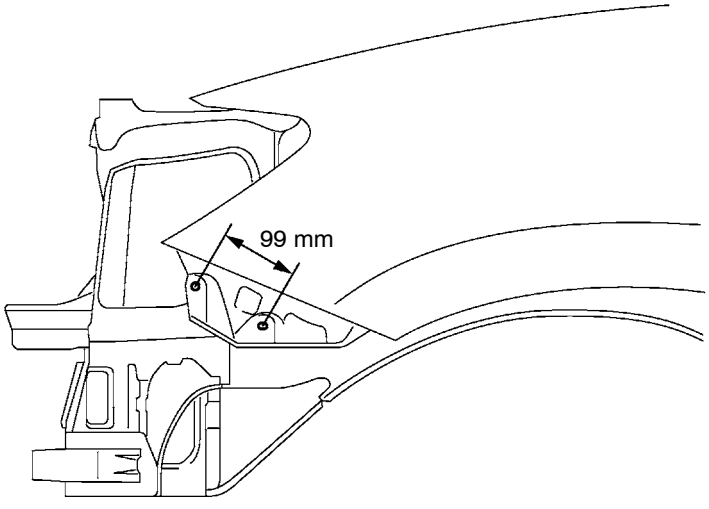

F20974

POINT

1 Measure the dimensions before installing the headlights.
2 These values are reference values.

99 mm (3.90 in.) 307 mm (12.09 in.) 669 mm (26.34 in.) 932 mm (36.69 in.)